

[Attachment]

Packaging materials/structure grade display design (with regard to Article 4)

1. Packaging materials/structure grade display design

A. Display of a grade with a recycling mark

(1) Where the grade is displayed at the top



(2) Where the grade is displayed at the bottom



B. Display of a grade without a recycling mark

(1) Where the grade is displayed in the front/side

랩 : PVC
재활용 어려움

랩 : PVC 재활용 어려움

(2) Where the grade is displayed at the top/bottom of barcode



랩 : PVC
재활용 어려움

2. Design drawing guidelines

A. Display of a grade with a recycling mark


(1) Where the grade is displayed at the top



Note 1. The space between texts indicating the material and packaging material/structure assessment result below the recycling symbol shall be 0.6A.

2. The size of texts indicating the material/structure assessment result shall be 2.4A.

(2) Where the grade is displayed at the bottom

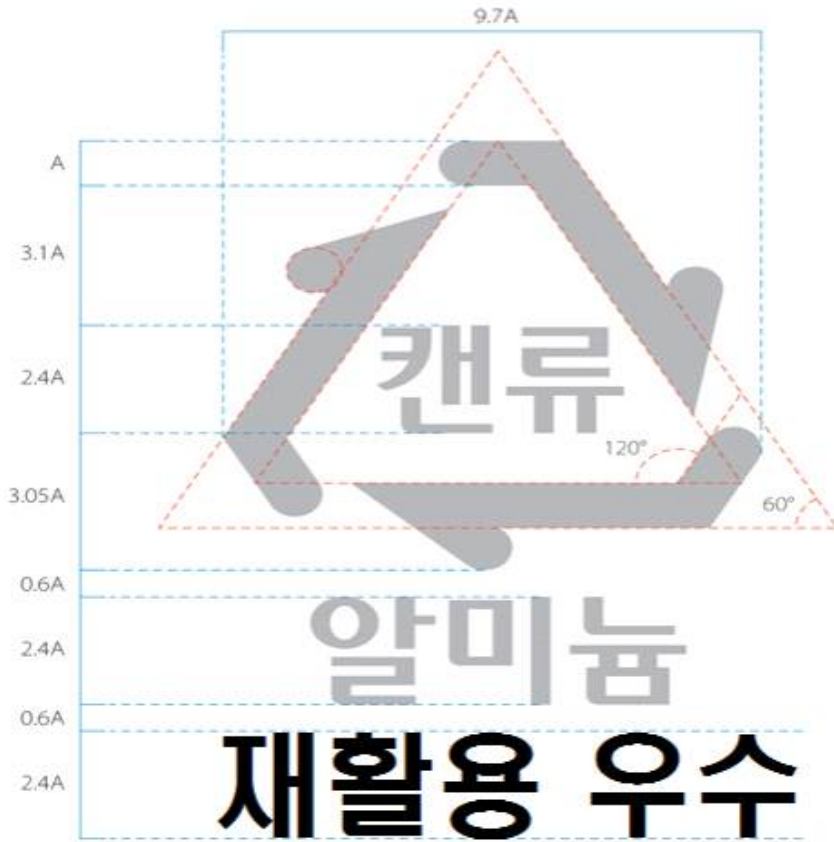

8mm  심벌마크의 최소크기는 8mm이상(표시재질 문자제외)으로 한다.

Note 1. The space between texts indicating the material and packaging material/structure assessment result below the recycling symbol shall be 0.6A.

2. The size of texts indicting the material/structure assessment result shall be 2.4A.

B. Display of a grade without a recycling mark

랩 : PVC 재활용 어려움

랩 : PVC	1A
재활용 어려움	1A

Note: The text size shall be at least 2mm.